```
Name Parameter Applied to a Class
```

FIG. 2B

Name Parameter Applied to a Property or Field

```
[ReelActionScript]

public class MyClass

{

    // this field would be represented under the "myValue" name in
    // ActionScript (not "_MyValue")

    [ReelActionScript(Name = "myValue")]

    private int _MyValue;
```

FIG. 2C

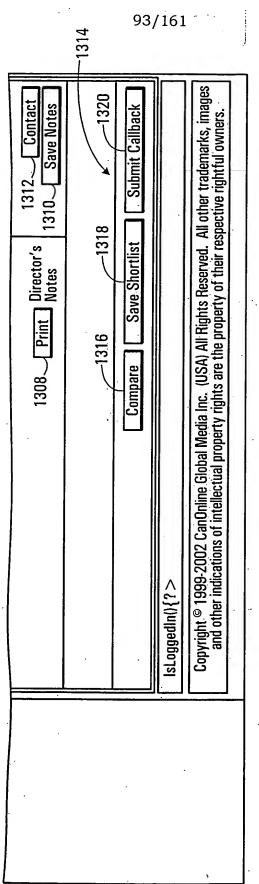


FIG. 71B

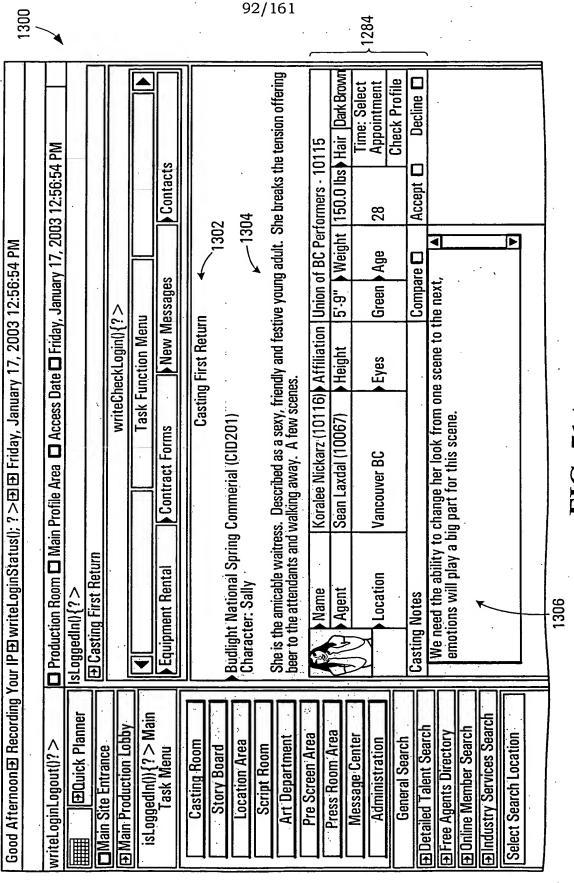


FIG. 71A